

# Technical Specifications

## Core and Enterprise

### POWER and DATA Specifications

	<b>SensArray</b>	
	<b>Core</b>	<b>Enterprise</b>
Data Interface	TCP/IP (1 x RJ-45)	TCP/IP (4 x RJ-45)
Input Power via POE, POE+	802.3bt PoE+ Class 8 <sup>2</sup> PD (receive power)  PoE+ power supply, P/N POE 90U-1BT	802.3bt PoE+ Class 8 <sup>2</sup> PD (receivepower on) on Port 0  RJ-45, Class 4 PSE on Port 1, 2 and 3  PoE+ power supply, P/N POE 90U-1BT
DC power input	N/A	N/A
LED Status Indicator	Flashes RED during booting, flashes GREEN when operational. Toggles between RED and GREEN when the "Locate" function is active	
RJ45 Status Indicators	GREEN indicates full duplex when lit, half duplex when dark, YELLOW indicates 100 MBS when lit, 10 MBS when dark	
Software Support	APIs, DLL, sample code, RFID Console	
Power Consumption @30dBm/Idle	15W, excluding GPIO and PoE output	
Maximum supported RFID read zones, w/one zone at 33 dBm	N/A	100, with SensThys power Injector Max length of Cat6 at 100 meters

<sup>1</sup>Class 4 (25.5-30W)    <sup>2</sup>Class 8 (71.3-90W)

## READER Specifications

	<b>SensArray</b>	
	<b>Core</b>	<b>Enterprise</b>
Reader Protocol	EPC Class 1 Gen 2 and 18000 – 6C	
Operating Frequency	902.75 MHz – 927.25 MHz	
Hopping Channels	50	
Channel Spacing	500 KHz	
Channel Dwell Time	< 0.4 seconds	
RF Transmitter	33 dBm	
Modulation Methods	Phase Reversal – Amplitude Shift Keying (PR-ASK) Double Side Band – Amplitude Shift Keying (DB-ASK)	
20 db Modulation Bandwidth	< 100 KHz	
Read Architecture	Impinj R2000 chip, M Power	

## ANTENNA Specifications

	<b>SensArray</b>	
	<b>Core</b>	<b>Enterprise</b>
External RF Antenna Ports	3 x RP-SMA	3 x RP-SMA
RF Transmit Power (dBm)	+33 dBm	+33 dBm
Operating Frequency	902.75 MHz – 927.25 MHz (Region code is field assignable via software) Other regions: <a href="https://www.gs1.org/docs/epcglobal/UHF_Regulations.pdf">https://www.gs1.org/docs/epcglobal/UHF_Regulations.pdf</a>	
Integrated Antenna	30W at antenna	
Polarization	Right-hand Circular	
Gain	8.5 dBiC	

## PHYSICAL and ENVIRONMENTAL Specifications

	<b>SensArray</b>	
	<b>Core</b>	<b>Enterprise</b>
Dimensions	(cm) 25.4 x 25.4 x 2.0 • (in) 10 x 10 x 0.8	
Weight	Approximately 0.79 kg (1.73 lbs)	
Operating Temperature	0°C to +50°C	
Compliance Certifications	FCC Part 15; FCC ID: pending IC: Pending Safety tested tounified 60950-1(CB Report): Pending	FCC Part 15; FCC ID: pending IC: Pending Safety tested tounified 60950-1(CB Report): Pending

## PART NUMBERS

	<b>SensArray</b>	
	<b>Core</b>	<b>Enterprise</b>
North America	SO21330-FR	SE24370-FR
Europe	SO21330-ER	SE24370-ER

## GPIO (General Purpose Input/Output) Connector

The SensArray GPIO port provides for four control inputs and four outputs. To use the GPIO, the SensArray should be connected to external ground via pins 2 and/or 12.

The SensThys Core and Enterprise offer optically isolated GPIO functionality, with four inputs and four outputs.

- The Outputs behave as relays that are open when "off" and closed when "on". Specifically, the pin is tied to ground when "on", and is open when "off".
- The Inputs translate high voltages as digital "1" that can be used in the control logic of the sensor.
- The Core and Enterprise also provide a switchable 24V, 1.2A power source to drive 24V accessories.
- The One and Pro models provide 24v, 600 mA power source to drive 24v accessories.

### Background

Power to energize external devices can be sourced in two different ways.

First, external devices can be powered from the SensArray powered through POE input. This power can be delivered to the external device via pin 11, which provides 24 VDC to a maximum of 1200 mA. Users should bear in mind that using GPIO power from the SensArray decreases the amount of power that can be provided to other POE devices connected to the SensArray.

Alternatively, power for devices controlled by the SensArray can be provided externally, by connecting +24VDC to pin 1. Provided that the power source connected to pin 1 can meet the power needs of external devices, the power that can be provided to other POE devices connected is not reduced. Note, though, power provided by the +24VDC input does not provide power to the POE system, i.e., providing power to the GPIO can reduce or eliminate the load of the external devices from the POE power system, but cannot extend the POE power delivery capabilities.

## GPIO Pin-out Specifications

Pin Number	SensArray Core & Enterprise
Pin 1	+24VDC Internal, max sourcing current: 1.2 A for Core and Enterprise 600 mA for One and Pro
Pin 2	External ground
Pin 3	Output 1
Pin 4	Output 2
Pin 5	Output 3
Pin 6	Output 4
Pin 7	Input 1 (5-24VDC)
Pin 8	Input 2 (5-24VDC)
Pin 9	Input 3 (5-24VDC)
Pin 10	Input 4 (5-24VDC)
Pin 11	+24VDC Internal, max sourcing current: 1.2A for Core and Enterprise 600 mA for One and Pro
Pin 12	External ground



Figure 1 GPIO PinOut

## Product Images

### Core



### Enterprise



## Drawings

The SensArray models share many common features and are identical in physical size. The SensArray can have **up to** four (4) PoE Ethernet ports. The unit can also include a GPIO port and 3 RP-SMA antenna ports for external UHF antennas.

The dimensions shown below are the same for all models of SensArray.

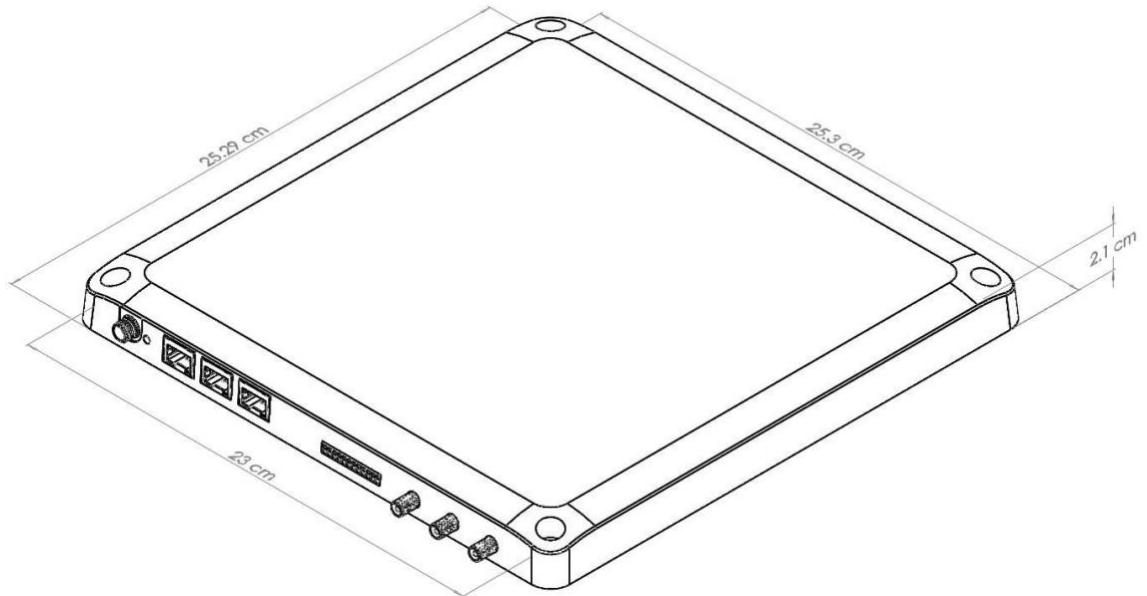


Figure 2 Perspective view of the SensArray

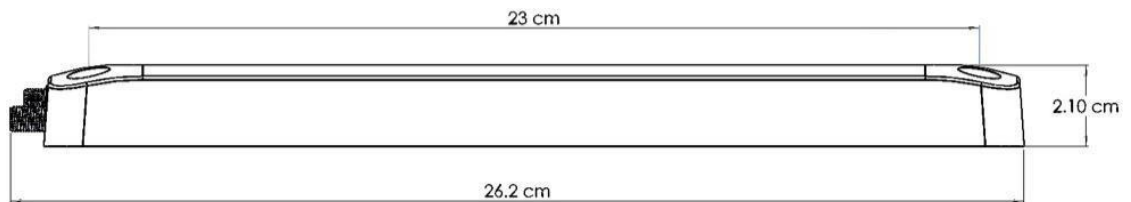
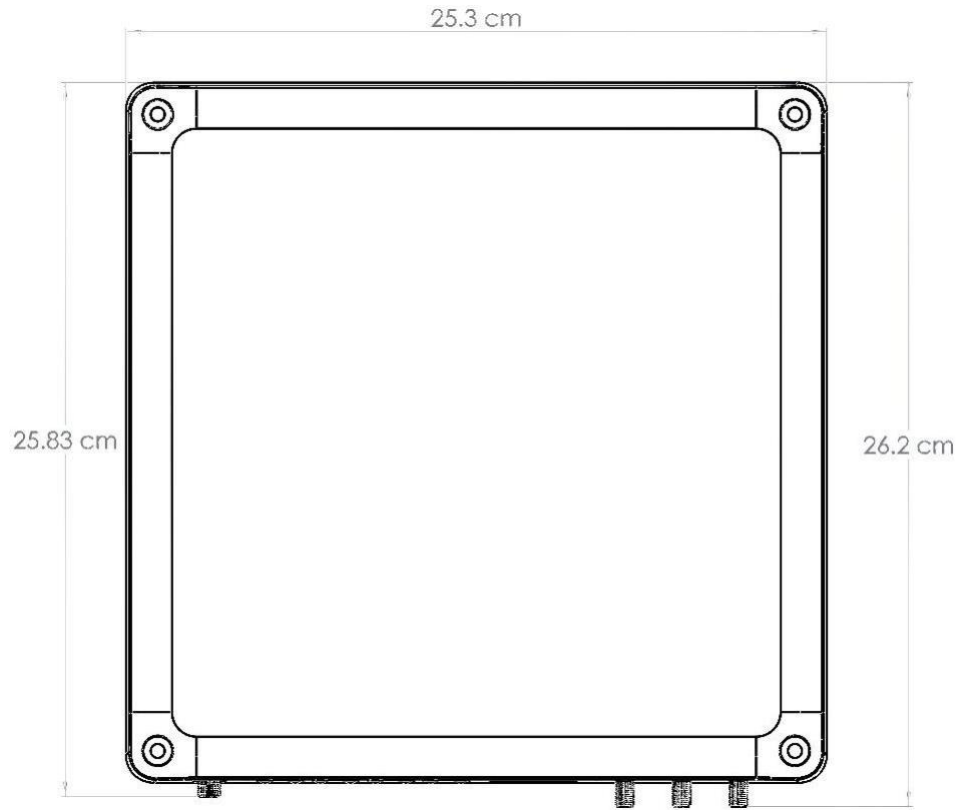


Figure 3 Side view of the SensArray



*Figure 4 Plan view of the SensArray*